

Roof Lifecycle Cost Analysis

Planned maintenance is projected to save the owner of a typical Hampton Roads medical facility **\$1.02M** over the next 20 years.

That is 61.5% less than the reactive cost, or \$445K in today's dollars. It compares PaxSeal planned maintenance with fixing problems only after they leak, using Hampton Roads costs and storm history.

MARKET	PROPERTY	ROOF AREA	SYSTEM	AGE	NEW ROOF TODAY
Hampton Roads	Medical	60,000 sq ft	Mod bit	8 yrs Good	\$480K

PAXSEAL NET COST

\$638K

\$1.17M spent, less \$531K roof life left

REACTIVE NET COST

\$1.66M

\$1.74M spent, less \$79K roof life left

EMERGENCY COSTS CUT

\$895K

Unbudgeted repairs and storm damage avoided; \$4.42 back per fee dollar


NEW ROOF PRICE

2× in 15 yrs

\$480K today, \$1.18M by year 20

Cumulative roof spending, next 20 years Nominal dollars. Vertical jumps are full roof replacements.

With PaxSeal Reactive Price of a new roof that year Money kept by maintaining

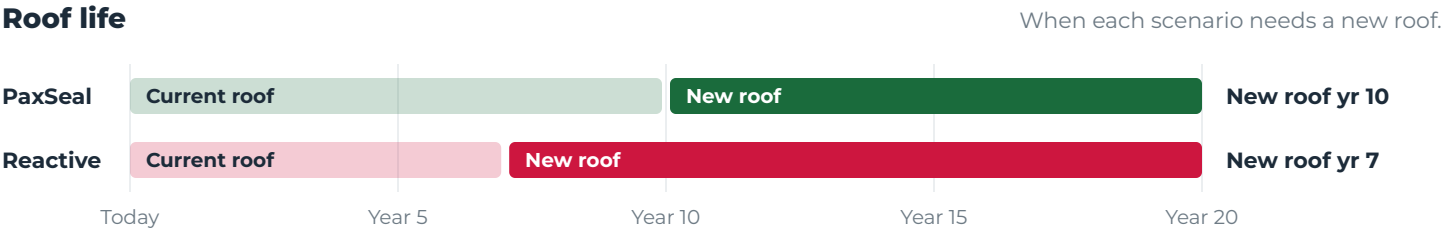

Where the savings come from

20-year totals

	PAXSEAL	REACTIVE	SAVINGS
PaxSeal program fees	\$231K	—	-\$231K
Repairs paid by owner	\$115K	\$975K	+\$860K
Expected storm damage	\$70K	\$105K	+\$35K
Roof replacements	\$753K	\$658K	-\$95K
Credit for roof life left	-\$531K	-\$79K	+\$452K
Net 20-year cost	\$638K	\$1.66M	+\$1.02M

What this means

- 1 **A later replacement.** Maintenance moves the next new roof from year 7 to year 10, so fewer roofs are bought over the period.
- 2 **Smaller repairs.** Problems found on a scheduled visit avoid emergency work, which costs about 3× as much. That saves \$860K in repairs.
- 3 **Operations keep running.** A leak in a clinical area triggers infection-control work, closes rooms and can damage equipment. Planned care keeps the roof from interrupting patient care.
- 4 **The program pays for itself.** Each \$1 of PaxSeal fees returns about \$4.42 in avoided cost.

Local risk profile

Norfolk City, VA (51710)

Hurricane / tropical-storm wind

~4.8 tropical storms or stronger within 50 nm of Norfolk per 20 years (NOAA HURDAT2 1975–2024). Expected storm damage to this roof over 20 years is **\$70K** if maintained and **\$105K** if neglected. A documented maintenance history also helps when an insurer questions a claim.

Hail	Low	■■■■■
Strong wind	Moderate	■■■■■
Tornado	Moderate	■■■■■
Hurricane	Moderate	■■■■■
Winter weather	Moderate	■■■■■
Ice storm	Moderate	■■■■■

FEMA National Risk Index rating

Key assumptions

Confidence reflects source strength. Values will be refined as research continues.

ASSUMPTION	VALUE	BASIS	CONFIDENCE
Roof life	20 / 15 yrs	Maintained / reactive. Fannie Mae service-life tables; +5 yrs from NRC Canada roof study and manufacturer warranty terms	MEDIUM
Roof cost growth	4.6%/yr	BLS Producer Price Index, nonresidential roofing contractors, 2007–2025	HIGH
Replacement cost	\$8.00/sq ft	Hampton Roads contractor price ranges	LOW
Reactive repair cost	3× planned	Industry estimates; no primary study found	LOW
Storm damage	0.44%/yr	Of roof cost. FEMA NRI expected annual building loss from hail, wind, tornado, hurricane and winter weather	MEDIUM
PaxSeal fee	\$8,600/yr	PAX program estimate for this roof size. Your proposal will state the actual fee	ESTIMATE
Leak consequences	1.40× warehouse	Scales reactive repair costs. Order supported by school-closure, hospital infection-control and insurer water-damage evidence; exact values are estimates	LOW

Estimates, not a quote. Projections use Hampton Roads market research and industry data, in nominal dollars; actual costs will differ. The PaxSeal fee is an estimate and your proposal will state the actual price. Net cost credits the roof life remaining at year 20.