PAX SERVICES GROUP

PAXSEAL™ BUILDING LIFECYCLE PLAN

Roof Lifecycle Cost Analysis

MARKET PROJECTION

Typical medical facility

San Antonio market

October 14, 2026

Planned maintenance is projected to save the owner of a typical San Antonio medical facility $993K over the next 20 years.

About 39% less than reactive repair: $768K lower spending plus $226K more roof life at year 20. Range $548K–$1.27M from conservative to upside assumptions; $511K in today's dollars at a 7% discount rate.

MARKET	PROPERTY	ROOF AREA	SYSTEM	AGE · CONDITION	NEW ROOF TODAY
San Antonio	Medical	60,000 sq ft	Modified bitumen	8 yrs · Good	$615K

PAXSEAL NET COST

$1.53M

$1.47M spent + $369K roof used − $308K roof left

REACTIVE NET COST

$2.52M

$2.23M spent + $369K roof used − $82K roof left

REPAIR & STORM SAVINGS

$1.13M

Unbudgeted repairs and storm damage avoided

ROOF PRICES

2× in 15 yrs

At 4.6%/yr, the long-run trend in commercial roofing costs


Cumulative roof spending, next 20 years

Nominal dollars. Vertical jumps are full roof replacements.



Roof life

When each scenario needs a new roof.

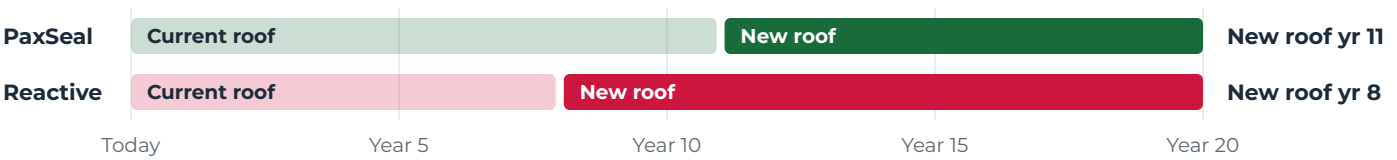

Where the savings come from

20-year totals

	PAXSEAL	REACTIVE	SAVINGS
PaxSeal fees	$231K	—	**−$231K**
Repairs paid by owner	$150K	$1.24M	**+$1.09M**
Expected storm damage	$77K	$116K	**+$39K**
Roof replacements	$1.01M	$881K	**−$129K**
Cash spending	**$1.47M**	**$2.23M**	**+$760K**
Current roof value used	$369K	$369K	—
Roof life left at year 20	−$307K	−$82K	**+$225K**
Net 20-year cost	**$1.53M**	**$2.52M**	**+$990K**

What this means

1. **A later replacement.** The next new roof moves from year 8 to year 11, leaving 10 years of roof life at year 20 instead of 2.
2. **Smaller repairs.** Emergency repairs run about 4.2× the planned rate in a medical facility, and the PaxSeal fee covers half of planned repairs. Together that saves $1.09M.
3. **Patient care keeps running.** A leak in a clinical area triggers infection-control work, closes rooms and can damage equipment.
4. **The program pays for itself.** Each $1 of fees avoids about $4.32 of other cash roof costs.

Local risk profile

Bexar County, TX (48029)

Hail and tornado

Baseball-size hail somewhere in Bexar County about once every 3 years (NOAA); April 2016 storm ≈ $1.4B damage. Expected storm damage to this roof over 20 years is **$77K** if maintained and **$116K** with reactive repair only, before insurance. A documented maintenance history also helps when an insurer reviews a claim.

Hail	**Very High**
Strong wind	**Relatively High**
Tornado	**Very High**
Hurricane	**Relatively Moderate**
Winter weather	**Relatively High**
Ice storm	**Relatively Moderate**

FEMA National Risk Index rating

Key assumptions

The basis for each figure in this analysis.

ASSUMPTION	VALUE	BASIS
Roof life	**20 / 15 yrs**	Maintained / reactive. Industry life tables; maintenance adds ~5 yrs (NRC Canada, warranties)
Roof cost growth	**4.6%/yr**	BLS Producer Price Index, nonresidential roofing, 2007–2025
Replacement cost	**$10.25/sq ft**	San Antonio contractor price ranges
Reactive repair cost	**3× planned × 1.4**	Industry estimates; ×1.4 for leak damage (medical facility). PaxSeal fee covers half of planned repairs
Storm damage	**0.38%/yr**	Of roof cost, before insurance; ×1.5 if reactive. FEMA National Risk Index
PaxSeal fee	**$8,600/yr**	Year 1, rising 3%/yr. Estimate; your proposal states the actual fee

Next step: a roof assessment and a written PaxSeal proposal for this building. Call PAX Services Group at 1-855-729-7510 or email info@paxserv.com.

Estimates, not a quote. Projections from San Antonio market research and industry data, in nominal dollars. The PaxSeal fee is an estimate; your proposal states the actual price. Net cost includes wear on the current roof, less roof life left at year 20; both roof-value figures are in today's dollars. Storm damage is before insurance.