PAX SERVICES GROUP

PAXSEAL™ BUILDING LIFECYCLE PLAN

Roof Lifecycle Cost Analysis

MARKET PROJECTION
Typical school

Austin market
October 14, 2026

Planned maintenance is projected to save the owner of a typical Austin school $1.98M over the next 20 years.

About 38% less than reactive repair: $1.49M lower spending plus $484K more roof life at year 20. Range $1.08M–$2.54M from conservative to upside assumptions; $1.02M in today's dollars at a 7% discount rate.

MARKET	PROPERTY	ROOF AREA	SYSTEM	AGE · CONDITION	NEW ROOF TODAY
Austin	K-12	120,000 sq ft	Modified bitumen	8 yrs · Good	$1.32M

PAXSEAL NET COST
$3.18M
$3.05M spent + $792K roof used − $660K roof left

REACTIVE NET COST
$5.16M
$4.54M spent + $792K roof used − $176K roof left

REPAIR & STORM SAVINGS
$2.21M
Unbudgeted repairs and storm damage avoided

ROOF PRICES
2× in 15 yrs
At 4.6%/yr, the long-run trend in commercial roofing costs


Cumulative roof spending, next 20 years

Nominal dollars. Vertical jumps are full roof replacements.



Roof life

When each scenario needs a new roof.

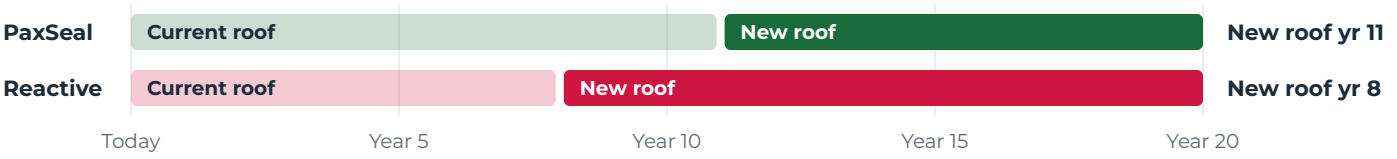

Where the savings come from

20-year totals

	PAXSEAL	REACTIVE	SAVINGS
PaxSeal fees	$441K	—	**−$441K**
Repairs paid by owner	$322K	$2.47M	**+$2.15M**
Expected storm damage	$122K	$183K	**+$61K**
Roof replacements	$2.16M	$1.89M	**−$270K**
Cash spending	**$3.05M**	**$4.54M**	**+$1.49M**
Current roof value used	$792K	$792K	—
Roof life left at year 20	−$660K	−$176K	**+$484K**
Net 20-year cost	**$3.18M**	**$5.16M**	**+$1.98M**

What this means

1. **A later replacement.** The next new roof moves from year 8 to year 11, leaving 10 years of roof life at year 20 instead of 2.
2. **Smaller repairs.** Emergency repairs run about 3.9× the planned rate in a school, and the PaxSeal fee covers half of planned repairs. Together that saves $2.14M.
3. **A predictable budget line.** Emergency repairs become a fixed annual cost the board can plan for, and leaks stop closing classrooms.
4. **The program pays for itself.** Each $1 of fees avoids about $4.38 of other cash roof costs.

Local risk profile

Travis County, TX (48453)

Hail and tornado

About 9 days with hail 2 inches or larger somewhere in Travis County per 20 years (NOAA 1996–2025). Expected storm damage to this roof over 20 years is **$122K** if maintained and **$183K** with reactive repair only, before insurance. A documented maintenance history also helps when an insurer reviews a claim.

Hail	**Very High**
Strong wind	**Relatively High**
Tornado	**Very High**
Hurricane	**Relatively Low**
Winter weather	**Relatively Moderate**
Ice storm	**Relatively High**

FEMA National Risk Index rating

Key assumptions

The basis for each figure in this analysis.

ASSUMPTION	VALUE	BASIS
Roof life	**20 / 15 yrs**	Maintained / reactive. Industry life tables; maintenance adds ~5 yrs (NRC Canada, warranties)
Roof cost growth	**4.6%/yr**	BLS Producer Price Index, nonresidential roofing, 2007–2025
Replacement cost	**$11.00/sq ft**	Austin contractor price ranges
Reactive repair cost	**3× planned × 1.3**	Industry estimates; ×1.3 for leak damage (school). PaxSeal fee covers half of planned repairs
Storm damage	**0.28%/yr**	Of roof cost, before insurance; ×1.5 if reactive. FEMA National Risk Index
PaxSeal fee	**$16,400/yr**	Year 1, rising 3%/yr. Estimate; your proposal states the actual fee

Next step: a roof assessment and a written PaxSeal proposal for this building. Call PAX Services Group at 1-855-729-7510 or email info@paxserv.com.

Estimates, not a quote. Projections from Austin market research and industry data, in nominal dollars. The PaxSeal fee is an estimate; your proposal states the actual price. Net cost includes wear on the current roof, less roof life left at year 20; both roof-value figures are in today's dollars. Storm damage is before insurance.