PAX SERVICES GROUP

PAXSEAL™ BUILDING LIFECYCLE PLAN

Roof Lifecycle Cost Analysis

MARKET PROJECTION

Typical medical facility

Laurel market

October 14, 2026

Planned maintenance is projected to save the owner of a typical Laurel medical facility $704K over the next 20 years.

About 37% less than reactive repair: $528K lower spending plus $176K more roof life at year 20. Range $357K–$922K from conservative to upside assumptions; $364K in today's dollars at a 7% discount rate.

MARKET	PROPERTY	ROOF AREA	SYSTEM	AGE · CONDITION	NEW ROOF TODAY
Laurel	Medical	60,000 sq ft	Modified bitumen	8 yrs · Good	$480K

PAXSEAL NET COST

$1.20M

$1.16M spent + $288K roof used − $240K roof left

REACTIVE NET COST

$1.91M

$1.68M spent + $288K roof used − $64K roof left

REPAIR & STORM SAVINGS

$859K

Unbudgeted repairs and storm damage avoided

ROOF PRICES

2× in 15 yrs

At 4.6%/yr, the long-run trend in commercial roofing costs


Cumulative roof spending, next 20 years

Nominal dollars. Vertical jumps are full roof replacements.



Roof life

When each scenario needs a new roof.

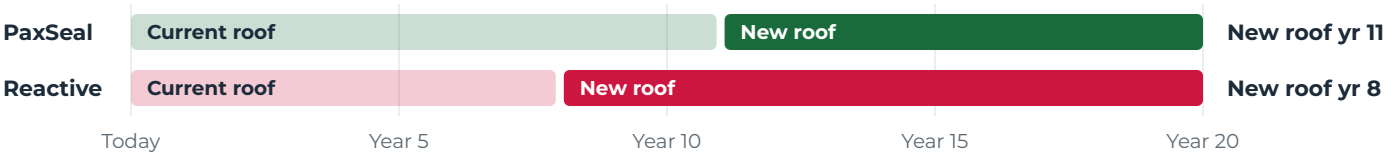

Where the savings come from

20-year totals

	PAXSEAL	REACTIVE	SAVINGS
PaxSeal fees	$231K	—	**−$231K**
Repairs paid by owner	$117K	$966K	**+$849K**
Expected storm damage	$20K	$30K	**+$10K**
Roof replacements	$787K	$688K	**−$99K**
Cash spending	**$1.16M**	**$1.68M**	**+$520K**
Current roof value used	$288K	$288K	—
Roof life left at year 20	−$240K	−$64K	**+$176K**
Net 20-year cost	**$1.20M**	**$1.91M**	**+$710K**

What this means

1. **A later replacement.** The next new roof moves from year 8 to year 11, leaving 10 years of roof life at year 20 instead of 2.
2. **Smaller repairs.** Emergency repairs run about 4.2× the planned rate in a medical facility, and the PaxSeal fee covers half of planned repairs. Together that saves $849K.
3. **Patient care keeps running.** A leak in a clinical area triggers infection-control work, closes rooms and can damage equipment.
4. **The program pays for itself.** Each $1 of fees avoids about $3.29 of other cash roof costs.

Local risk profile

Prince George's County, MD (24033)

Thunderstorm wind / derecho, snow load

About 3–4 major regional roof-damaging events per 20 years, such as the 2010 snowstorms, the 2012 derecho and the 2016 blizzard. Expected storm damage to this roof over 20 years is **$20K** if maintained and **$30K** with reactive repair only, before insurance. A documented maintenance history also helps when an insurer reviews a claim.

Hail	**Relatively Moderate**
Strong wind	**Relatively High**
Tornado	**Relatively High**
Hurricane	**Relatively Moderate**
Winter weather	**Very High**
Ice storm	**Relatively Moderate**

FEMA National Risk Index rating

Key assumptions

The basis for each figure in this analysis.

ASSUMPTION	VALUE	BASIS
Roof life	**20 / 15 yrs**	Maintained / reactive. Industry life tables; maintenance adds ~5 yrs (NRC Canada, warranties)
Roof cost growth	**4.6%/yr**	BLS Producer Price Index, nonresidential roofing, 2007–2025
Replacement cost	**$8.00/sq ft**	Laurel contractor price ranges
Reactive repair cost	**3× planned × 1.4**	Industry estimates; ×1.4 for leak damage (medical facility). PaxSeal fee covers half of planned repairs
Storm damage	**0.13%/yr**	Of roof cost, before insurance; ×1.5 if reactive. FEMA National Risk Index
PaxSeal fee	**$8,600/yr**	Year 1, rising 3%/yr. Estimate; your proposal states the actual fee

Next step: a roof assessment and a written PaxSeal proposal for this building. Call PAX Services Group at 1-855-729-7510 or email info@paxserv.com.

Estimates, not a quote. Projections from Laurel market research and industry data, in nominal dollars. The PaxSeal fee is an estimate; your proposal states the actual price. Net cost includes wear on the current roof, less roof life left at year 20; both roof-value figures are in today's dollars. Storm damage is before insurance.