PAX SERVICES GROUP

PAXSEAL™ BUILDING LIFECYCLE PLAN

Roof Lifecycle Cost Analysis

MARKET PROJECTION
Typical school

San Antonio market
October 14, 2026

Planned maintenance is projected to save the owner of a typical San Antonio school $1.83M over the next 20 years.

About 38% less than reactive repair: $1.38M lower spending plus $451K more roof life at year 20. Range $999K–$2.36M from conservative to upside assumptions; $949K in today's dollars at a 7% discount rate.

MARKET	PROPERTY	ROOF AREA	SYSTEM	AGE · CONDITION	NEW ROOF TODAY
San Antonio	K-12	120,000 sq ft	Modified bitumen	8 yrs · Good	$1.23M

PAXSEAL NET COST
$3.03M
$2.91M spent + $738K roof used − $615K roof left

REACTIVE NET COST
$4.87M
$4.29M spent + $738K roof used − $164K roof left

REPAIR & STORM SAVINGS
$2.08M
Unbudgeted repairs and storm damage avoided

ROOF PRICES
2× in 15 yrs
At 4.6%/yr, the long-run trend in commercial roofing costs


Cumulative roof spending, next 20 years

Nominal dollars. Vertical jumps are full roof replacements.



Roof life

When each scenario needs a new roof.

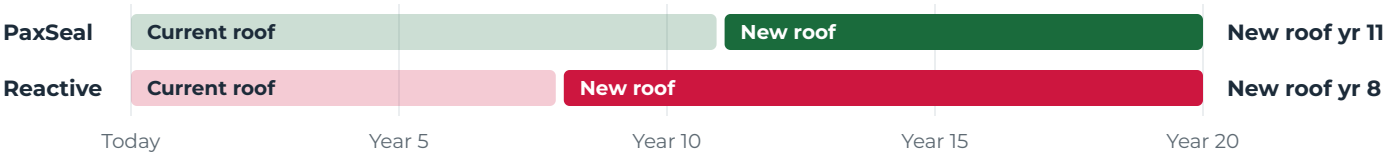

Where the savings come from

20-year totals

	PAXSEAL	REACTIVE	SAVINGS
PaxSeal fees	$441K	—	**−$441K**
Repairs paid by owner	$300K	$2.30M	**+$2.00M**
Expected storm damage	$154K	$231K	**+$77K**
Roof replacements	$2.02M	$1.76M	**−$260K**
Cash spending	**$2.91M**	**$4.29M**	**+$1.38M**
Current roof value used	$738K	$738K	—
Roof life left at year 20	−$615K	−$164K	**+$451K**
Net 20-year cost	**$3.03M**	**$4.87M**	**+$1.84M**

What this means

1. **A later replacement.** The next new roof moves from year 8 to year 11, leaving 10 years of roof life at year 20 instead of 2.
2. **Smaller repairs.** Emergency repairs run about 3.9× the planned rate in a school, and the PaxSeal fee covers half of planned repairs. Together that saves $2.00M.
3. **A predictable budget line.** Emergency repairs become a fixed annual cost the board can plan for, and leaks stop closing classrooms.
4. **The program pays for itself.** Each $1 of fees avoids about $4.13 of other cash roof costs.

Local risk profile

Bexar County, TX (48029)

Hail and tornado

Baseball-size hail somewhere in Bexar County about once every 3 years (NOAA); April 2016 storm ≈ $1.4B damage. Expected storm damage to this roof over 20 years is **$154K** if maintained and **$231K** with reactive repair only, before insurance. A documented maintenance history also helps when an insurer reviews a claim.

Hail	**Very High**
Strong wind	**Relatively High**
Tornado	**Very High**
Hurricane	**Relatively Moderate**
Winter weather	**Relatively High**
Ice storm	**Relatively Moderate**

FEMA National Risk Index rating

Key assumptions

The basis for each figure in this analysis.

ASSUMPTION	VALUE	BASIS
Roof life	**20 / 15 yrs**	Maintained / reactive. Industry life tables; maintenance adds ~5 yrs (NRC Canada, warranties)
Roof cost growth	**4.6%/yr**	BLS Producer Price Index, nonresidential roofing, 2007–2025
Replacement cost	**$10.25/sq ft**	San Antonio contractor price ranges
Reactive repair cost	**3× planned × 1.3**	Industry estimates; ×1.3 for leak damage (school). PaxSeal fee covers half of planned repairs
Storm damage	**0.38%/yr**	Of roof cost, before insurance; ×1.5 if reactive. FEMA National Risk Index
PaxSeal fee	**$16,400/yr**	Year 1, rising 3%/yr. Estimate; your proposal states the actual fee

Next step: a roof assessment and a written PaxSeal proposal for this building. Call PAX Services Group at 1-855-729-7510 or email info@paxserv.com.

Estimates, not a quote. Projections from San Antonio market research and industry data, in nominal dollars. The PaxSeal fee is an estimate; your proposal states the actual price. Net cost includes wear on the current roof, less roof life left at year 20; both roof-value figures are in today's dollars. Storm damage is before insurance.