PAX SERVICES GROUP

PAXSEAL™ BUILDING LIFECYCLE PLAN

Roof Lifecycle Cost Analysis

MARKET PROJECTION

Typical mixed-use building

Laurel market

October 14, 2026

Planned maintenance is projected to save the owner of a typical Laurel mixed-use building $211K over the next 20 years.

About 30% less than reactive repair: $140K lower spending plus $71K more roof life at year 20. Range $90K–$288K from conservative to upside assumptions; $112K in today's dollars at a 7% discount rate.

MARKET	PROPERTY	ROOF AREA	SYSTEM	AGE · CONDITION	NEW ROOF TODAY
Laurel	Mixed Use	25,000 sq ft	TPO	8 yrs · Good	$193K

PAXSEAL NET COST

$499K

$479K spent + $116K roof used − $96K roof left

REACTIVE NET COST

$710K

$620K spent + $116K roof used − $26K roof left

VALUE PROTECTED

$120K

$8K/yr more NOI at a 6.6% cap rate, if the owner pays for the roof

ROOF PRICES

2× in 15 yrs

At 4.6%/yr, the long-run trend in commercial roofing costs


Cumulative roof spending, next 20 years

Nominal dollars. Vertical jumps are full roof replacements.



Roof life

When each scenario needs a new roof.

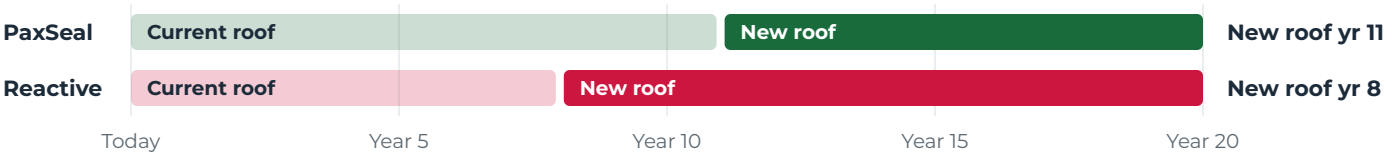

Where the savings come from

20-year totals

	PAXSEAL	REACTIVE	SAVINGS
PaxSeal fees	$109K	—	**−$109K**
Repairs paid by owner	$47K	$332K	**+$285K**
Expected storm damage	$8K	$12K	**+$4K**
Roof replacements	$316K	$276K	**−$40K**
Cash spending	**$479K**	**$620K**	**+$141K**
Current roof value used	$116K	$116K	—
Roof life left at year 20	−$96K	−$26K	**+$70K**
Net 20-year cost	**$499K**	**$710K**	**+$211K**

What this means

1. **A later replacement.** The next new roof moves from year 8 to year 11, leaving 10 years of roof life at year 20 instead of 2.
2. **Smaller repairs.** Emergency repairs run about 3.6× the planned rate in a mixed-use building, and the PaxSeal fee covers half of planned repairs. Together that saves $285K.
3. **Both income streams protected.** A leak can close the ground-floor retail and damage the offices or apartments above.
4. **The program pays for itself.** Each $1 of fees avoids about $2.29 of other cash roof costs.

Local risk profile

Prince George's County, MD (24033)

Thunderstorm wind / derecho, snow load

About 3–4 major regional roof-damaging events per 20 years, such as the 2010 snowstorms, the 2012 derecho and the 2016 blizzard. Expected storm damage to this roof over 20 years is **$8K** if maintained and **$12K** with reactive repair only, before insurance. A documented maintenance history also helps when an insurer reviews a claim.

Hail	**Relatively Moderate**
Strong wind	**Relatively High**
Tornado	**Relatively High**
Hurricane	**Relatively Moderate**
Winter weather	**Very High**
Ice storm	**Relatively Moderate**

FEMA National Risk Index rating

Key assumptions

The basis for each figure in this analysis.

ASSUMPTION	VALUE	BASIS
Roof life	**20 / 15 yrs**	Maintained / reactive. Industry life tables; maintenance adds ~5 yrs (NRC Canada, warranties)
Roof cost growth	**4.6%/yr**	BLS Producer Price Index, nonresidential roofing, 2007–2025
Replacement cost	**$7.70/sq ft**	Laurel contractor price ranges
Reactive repair cost	**3× planned × 1.2**	Industry estimates; ×1.2 for leak damage (mixed-use building). PaxSeal fee covers half of planned repairs
Storm damage	**0.13%/yr**	Of roof cost, before insurance; ×1.5 if reactive. FEMA National Risk Index
PaxSeal fee	**$4,050/yr**	Year 1, rising 3%/yr. Estimate; your proposal states the actual fee
Cap rate	**6.6%**	PAX regional median

Next step: a roof assessment and a written PaxSeal proposal for this building. Call PAX Services Group at 1-855-729-7510 or email info@paxserv.com.

Estimates, not a quote. Projections from Laurel market research and industry data, in nominal dollars. The PaxSeal fee is an estimate; your proposal states the actual price. Net cost includes wear on the current roof, less roof life left at year 20; both roof-value figures are in today's dollars. Storm damage is before insurance. Property value is the yearly gain in net operating income divided by the cap rate, for income property where the owner pays for the roof.